


Code#	Inside Diameter (inch)	Inside Diameter (mm)
860	0.0860	2.18
830	0.0830	2.11
810	0.0810	2.06
790	0.0790	2.01
770	0.0770	1.96
745	0.0745	1.89
730	0.0735	1.87
720	0.0720	1.83
710	0.0710	1.80
700	0.0700	1.78
690	0.0690	1.75
660	0.0660	1.68
640	0.0640	1.63
630	0.0630	1.60
610	0.0610	1.55
600	0.0600	1.52
580	0.0580	1.47
575	0.0575	1.46
560	0.0560	1.42
530	0.0530	1.35
520	0.0520	1.32
510	0.0510	1.30
500	0.0500	1.27
490	0.0490	1.24
480	0.0480	1.22
470	0.0470	1.19
450	0.0450	1.14
445	0.0445	1.13
430	0.0430	1.09
420	0.0420	1.07
410	0.0410	1.04
400	0.0400	1.02
395	0.0395	1.00
390	0.0390	0.99
380	0.0380	0.97
370	0.0370	0.94
360	0.0360	0.91
350	0.0350	0.89
340	0.0340	0.86
335	0.0335	0.85
325	0.0325	0.83

Code#	Inside Diameter (inch)	Inside Diameter (mm)
320	0.0320	0.81
315	0.0315	0.80
310	0.0310	0.79
300	0.0300	0.76
295	0.0295	0.75
285	0.0285	0.72
275	0.0275	0.70
265	0.0265	0.67
260	0.0260	0.66
250	0.0250	0.64
245	0.0245	0.62
235	0.0235	0.60
220	0.0220	0.56
215	0.0215	0.55
210	0.0210	0.53
195	0.0195	0.50
190	0.0190	0.48
185	0.0185	0.47
175	0.0175	0.44
165	0.0165	0.42
160	0.0160	0.41
155	0.0155	0.39
150	0.0150	0.38
145	0.0145	0.37
135	0.0135	0.34
130	0.0130	0.33
125	0.0125	0.32
120	0.0120	0.30
110	0.0110	0.28
100	0.0100	0.25
095	0.0098	0.25
085	0.0087	0.22
080	0.0080	0.20
075	0.0078	0.20
068	0.0069	0.18
061	0.0061	0.15
054	0.0055	0.14
049	0.0049	0.12
044	0.0044	0.11
039	0.0039	0.10

USP Class VI
BIOCOMPATIBLE

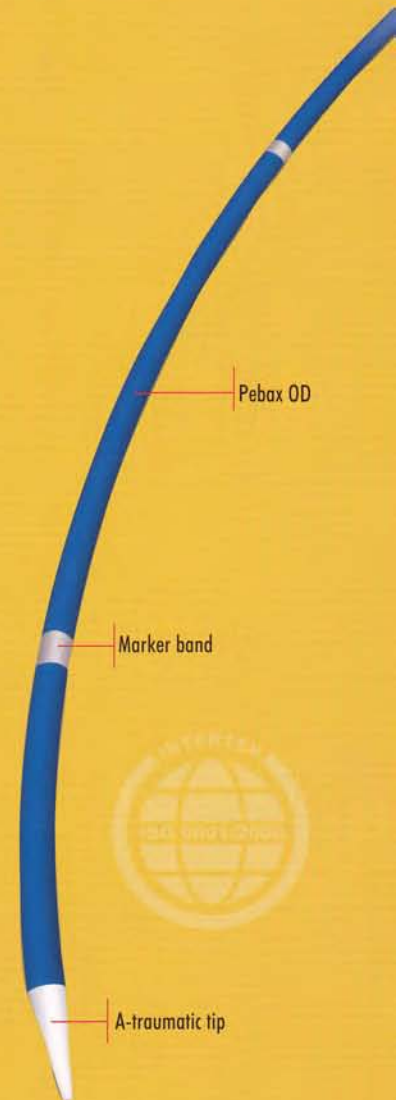

Note: The dimensional information provided is specific to polyimide tubing and is only a guideline. Products are custom manufactured to meet customer specifications. Samples of a variety of sizes and materials are available.



7624 Bald Cypress Place | Tampa, FL 33614 USA
Phone 813-886-1200 | Fax: 813-886-3262 | www.microlumen.com