



### **Innovative Adhesives for Medical Applications**

**Panacol Vitralit<sup>®</sup>, Structalit<sup>®</sup>  
and Cyanolit<sup>®</sup> Adhesives**

**Hönle UV-Curing Systems -  
bluepoint LED eco, LED Powerline, LED Spot 100**

### **Adhesives**

- Certified USP Class VI and/or ISO 10993
- 100% solvent free
- Fast curing with UV and visible light
- Convenient handling
- Compatible with common sterilization processes

### **UV-Curing Systems**

- High UV-intensity
- Curable with UV-LED only, to eliminate heat
- Easily adaptable to existing production lines
- Optimum quality, efficiency, and value
- LED failure detection for a save process

## Advanced Adhesive Technologies for Medical Applications Certified USP Class VI and/or ISO 10993

Panacol develops and produces cutting-edge adhesives for medical applications within a wide range of chemistries. This includes UV and visible light curable adhesives, coating materials, potting compounds, instant-cure adhesives, and 2-part epoxies. All products are formulated to meet the biocompatibility standards of USP Class VI and/or ISO 10993 standards.

### Complete Solutions for Your Assembly Process

Dr. Höhle Group offers compatible system technology: Panacol's high performance adhesives and complementing UV- and LED equipment manufactured by Dr. Höhle AG ensure rapid bonding at an optimum quality.

Höhle system solutions provide excellent technical competence and process reliability.

### Typical Applications

- Joining stainless steel cannulae to transparent or translucent hubs and syringes
- Bonding/sealing of transparent polycarbonate or acrylic housing parts in blood oxygenators
- Bonding/sealing stainless steel cannulae into flexible PVC infusion lines
- Bonding soft PVC to rigid PVC in anaesthesia masks
- Bonding of subassemblies in blood pressure transducers, stopcocks, fittings, adapters and arterial filters
- Coating of PCBs in hearing aids


### Key Benefits of Panacol High-Tech-Medical-Adhesives

- Certified USP Class VI and/or ISO 10993
- 100% solvent free
- High productivity due to fast curing within seconds
- Compatible with common sterilization processes
- Excellent adhesion to glass, plastics and metals

	Cyanolit 203 TX	Cyanolit 241 F	Cyanolit 732 F
<b>Typical Applications</b>	Tube Bonding, Large Gap Bonding, Porous Material	Plastics - Metal Bonding	Bonding of Colored Plastics, Delicate Bonding
Base	Cyanoacrylate	Cyanoacrylate	Cyanoacrylate
Viscosity (cP/mPas)	5,000 – 10,000	30 – 50	250 – 350
Rockwell Hardn.	70 – 85	70 – 85	70 – 85
Certification	USP Class VI	USP Class VI	USP Class VI
<b>Typical Substrates</b>	PA, PC, ABS, PVC, EPDM	PVC, PMMA, Copper, Al, Steel	PVC, PMMA, ABS, EPDM, Stainl. Steel
<b>Special Properties</b>	Gap Filling, Highly Viscous	Low Viscosity, Capillary Flow, Good Wetting Properties	Very Fast Setting Time, Wide Range of Applications

- Bonding of difficult substrates possible
- Flexible usage for manual and automated production process
- Wide viscosity range from capillary flow to gap filling
- Optimum process control with our fluorescent adhesives

### Needle Bonding

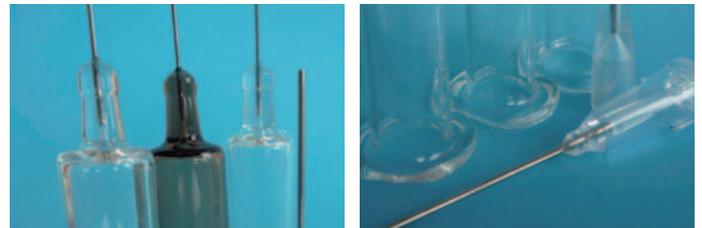

- Vitralit® 7041/7041 T and UV 4050 are an excellent choice for metal-plastic bonding
- Vitralit® 6108/6108 T achieve optimum adhesion properties on glass and metal
- Reliable bonded joints without material cracking
- High extraction force after autoclave sterilization EO- and Gamma-radiation treatment

### Adhesion Properties on Different Substrates

Adhesive	Structalit		Vitalit												
	701	1655	7222	UV 4050	7041/F	7041 T	7090 VHS	7989	5140	1702	1703	6108	6108 T	4731	7562
PMMA	△	△	●	●	✓	✓	●	●	●	●	●	△	△	✓	●
PC	●	△	●	✓	✓	✓	✓	✓	●	✓	✓	●	●	✓	●
PVC-hard	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●
PET-A	●	△	●	●	✓	✓	●	●	●	△	△	△	△	✓	●
PET-G	●	△	●	●	✓	✓	●	●	●	●	●	△	△	✓	●
PUR	●	●	●	✓	✓	✓	●	✓	●	●	●	△	△	●	△
PS	●	△	●	✓	✓	✓	●	●	✓	●	●	△	△	●	●
PP	△	△	△	△	●	●	△	△	△	△	△	△	△	△	△
ABS	✓	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●
SAN	●	✓	●	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	●
Glass	✓	△	✓	✓	✓	✓	△	●	●	●	●	✓	✓	✓	✓
Steel	✓	●	✓	✓	✓	✓	△	●	●	△	△	✓	✓	✓	✓
Stainl.Steel	✓	●	✓	✓	✓	✓	△	●	●	△	△	✓	✓	✓	✓
Aluminum	✓	△	✓	●	●	●	△	●	●	△	△	✓	✓	△	✓
Brass	✓	△	●	△	●	●	△	●	△	△	△	✓	✓	●	●

✓ very good ● application related △ surface pretreatment required

## Optimized Bonding Solutions

### Customized Solutions for Unique Applications

Panacol provides innovative solutions for your needs:

All adhesives can be individually tailored and tuned to your special requirements.

For further information please contact us at [info@panacol.de](mailto:info@panacol.de).



	Structalite 701	Vitalit 1655 <b>NEW</b>	Vitalit 7222
<b>Typical Applications</b>	Surgical Instruments, Endoscopes, Optical Fibers	Bonding and Coating of Plastics	Electronic Component Assembly for Medical Equipment
Base	2-part Epoxy	1-part Epoxy	1-part Epoxy
Viscosity Brookfield LVT, 25°C [cP/mPas]	3,000 – 5,000	150 – 300	200 – 500
Tg (DSC) [°C]	110 – 120	30 – 40	50 – 56
Curing	2 K, Thermal Cure at 80°C - 200°C	UVA-Curing, Thermal Cure at 105°C	UV-Curing, LED 365
Color	Brown	Transparent	Transp., Slightly Yellowish
Shore Hardness	80 – 90 D	70 – 80 A	77 – 82 D
Certification	USP Class VI ISO 10993-5	USP Class VI ISO 10993-5	USP Class VI
<b>Special Properties</b>	<b>Very Good Temperature Stability, Thermal Cure, Excellent Adhesion to Steel and Plastics</b>	<b>Flexible, High Strength Adhesion to Plastics and Metal</b>	<b>Superior Adhesion to Glass, Metal and Various Plastics</b>

	Vitalit UV 4050	Vitalit 7041/F	Vitalit 7041 T	Vitalit 7090 VHS	Vitalit 7989	Vitalit 5140
<b>Typical Applications</b>	Needle Bonding, Plastics	Needle Bonding, Connector and Tube Fittings, Housing Bonding, Dialysis Filter	Needle Bonding, Tattoo Needles, Connector and Tube Fittings, Housing Bonding, Dialysis Filter	Catheters, Needle Bonding, Endoscopes	PC-Container and Cover Bonding, Smear Brush	Coating of Electrical Components, Instruments, and Respiratory Mask Assembly
Base	Acrylate	Acrylate	Acrylate	Acrylate	Acrylate	Acrylate
Viscosity Brookfield LVT, 25°C [cP/mPas]	140 – 500	50 – 90	2,000 – 4,000	40 – 100	3,000 – 5,000	250 – 500
Tg (DSC) [°C]	35 – 45	32 – 42	38 – 47	60 – 80	37 – 47	1 – 10
Curing	UV- and Light Curing LED 365, 405	UV- and Light Curing LED 365, 405	UV- and Light Curing LED 365, 405	UV- and Light Curing LED 365, 405	UV-Curing, LED 365	UV- and Light Curing LED 365, 405
Color	Transparent, Yellowish	Transp., Slightly Yellowish	Transp., Slightly Yellowish	Transparent	Transp., Slightly Yellowish	Transparent
Shore Hardness	60 – 70 D	70 – 80 D	70 – 80 D	80 – 90 D	45 – 55 D	45 – 65 A
Certification	ISO 10993-5	USP Class VI ISO 10993-4 / -5	USP Class VI ISO 10993-4 / -5	USP Class VI	USP Class VI	USP Class VI
<b>Special Properties</b>	<b>Excellent Adhesion to Plastics, Glass and Metal</b>	<b>Capillary Flow, Fluorescent under Black Light, Excellent Adhesion to Plastics, PP and POM</b>	<b>Excellent Gap Bonding, Very Good Adhesion to Plastics</b>	<b>Capillary Flow, Fluorescent under Black Light, Excellent Adhesion to Plastics, Fast Curing at Low Intensity</b>	<b>Flexible, Excellent Adhesion to Plastics</b>	<b>Highly Elastic</b>

	Vitalit 1702	Vitalit 1703	Vitalit 6108	Vitalit 6108 T	Vitalit 4731 <b>NEW</b>	Vitalit 7562 <b>NEW</b>
<b>Typical Applications</b>	Tube Connectors, Back-Pressure Valves, Blood Filters	Tube Connectors, Back-Pressure Valves, Blood Filters	Needle Bonding, Glass Assembly	Needle Bonding, Glass Assembly	Tube Connectors, Housing Bonding	Glass Assembly
Base	Acrylate	Acrylate	Acrylate	Acrylate	Acrylate	Acrylate
Viscosity Brookfield LVT, 25°C [cP/mPas]	45 – 80	10,000 – 15,000	600 – 900	4,000 – 6,000	900–1,500	500 – 800
Tg (DSC) [°C]	75 – 85	80 – 90	45 – 70	45 – 70	20 – 40	-50 to -40
Curing	UV-Curing, LED 365, 405	UV-Curing, LED 365, 405	UV-Curing, LED 365, 405 Thermal Cure at 150°C	UV-Curing, LED 365, 405 Thermal Cure at 150°C	UV-Curing, LED 365, 405	UV-Curing, LED 365, 405
Color	Transparent Amber	Transparent	Transparent	Transparent	Transparent	Transparent
Shore Hardness	65 – 80 D	75 – 80 D	75 – 85 D	75 – 85 D	20 – 40 D	55 – 75 A
Certification	USP Class VI	USP Class VI	USP Class VI ISO 10993-5	USP Class VI	USP Class VI ISO 10993-5	USP Class VI ISO 10993-5
<b>Special Properties</b>	<b>Excellent Adhesion to Plastics, Capillary Flow, High E-Modulus</b>	<b>Very Good Adhesion to Plastics, Excellent Gap Filling, High E-Modulus</b>	<b>UV- and Thermal Curing (Dual Cure), Low Viscosity, Moisture Resistant, Very Good Adhesion to Glass and Metal</b>	<b>UV- and Thermal Curing (Dual Cure), Excellent Gap Filling, Damp-Proof</b>	<b>Flexible, Excellent Adhesion to Plastics and Glass</b>	<b>Flexible, Excellent Adhesion to Glass and Metal</b>

# Perfect Curing of Adhesives and Sealing Compounds with High Performance UV Equipment by Hönle


Dr. Hönle AG is one of the world's leading suppliers of industrial UV technology. Innovative Hönle UV-systems have been applied worldwide - as gas-discharge lamps and also as LED-versions.

Hönle and Panacol attach great importance to joint research and development. They have combined their knowledge and extensive experience which has led to comprehensive high-tech solutions in medical engineering.

## Hönle UV-Technology for Medical Applications

### bluepoint LED eco

bluepoint LED eco has been developed for all applications requiring a most intensive UV irradiation. Thanks to its high intensity and the capability to program complete process sequences, e.g. exposure series with different intensities

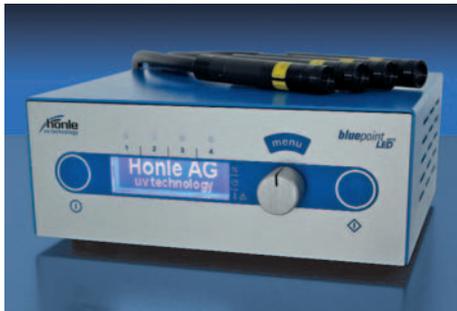

bluepoint LED eco

and holding times, it is possible to realize very short cycle and machine throughput times, especially in fully automated production lines.


### LED Powerline

LED Powerline is a high-performance array with all advantages of LED technology: LEDs have an extremely long lasting lifetime and do not require heating up or cooling phases.

LED Powerline is available in wavelengths of 365/385/395/405nm. This variety allows an exact adjustment of the wavelength to the respective application.

The LED array is available in different lengths from 80mm – in 40mm-steps variable – up to a length of > 1m.

New is a LED Powerline version with focusing lenses. They allow highest intensities, even if – due to the component architecture – only a larger distance between LED unit and component is possible. Thus the LED Powerline is perfect for applications like needle bonding.

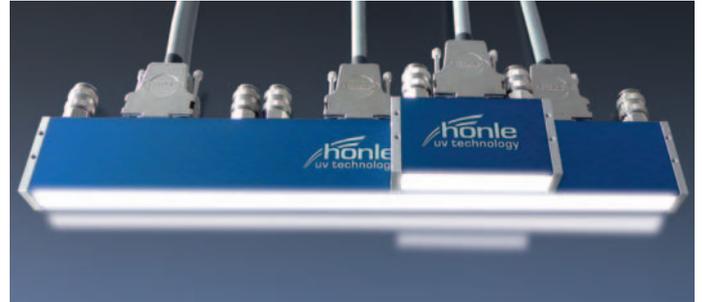

LED Powerline

### LED Spot 100

LED Spot 100 has been developed for all applications requiring a highly intensive UV irradiance over a large area, which can



LED Spot 100

optionally be enlarged by connecting several LED Spots 100 without gaps. The arrangement of the LEDs as well as an electronic power control guarantees a homogenous irradiation.

The recognition of LED-malfunction and a comprehensive monitoring function provide very high process stability.

LED Spot 100 is applied for manufacturing hearing devices or for tube bonding.

**hönle**group


Engineered Adhesives

UV-adhesives

Conductive adhesives

Potting

Curing

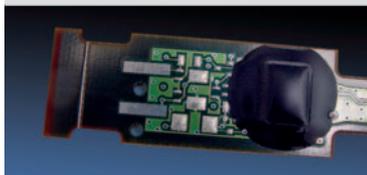

aladin

eleco-efd

eltosch

grafix

hönle

mitronic

panacol

printconcept

raesch

uv-technik speziallampen



Panacol-Elisol GmbH, Daimlerstr. 8, 61449 Steinbach/Taunus, Germany  
Phone: +49 6171 6202-0, Fax: +49 6171 6202-590, email: info@panacol.de. [www.panacol.com](http://www.panacol.com)

Operating parameters depend on production characteristics and may differ from the foregoing information. We reserve the right to modify technical data. © Copyright Panacol-Elisol GmbH. Updated 01/2015.